


NUC-61C3Z

Intel Celeron 3855U NUC with HDMI, VGA, Wi-Fi, Dual LAN and Console

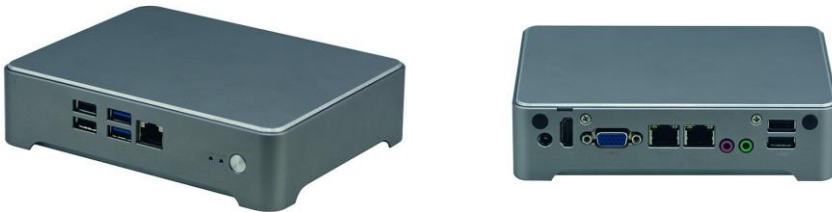

Feature:

- Fanless cooling design
- Al alloy chassis, compact structure, flexible installation
- 1xVGA,1xHDMI, support VGA+HDMI independent dual display
- 2 x Gigabit Ethernet port, supports Wake On LAN
- Rich I/O: 1xDC_Jack,1xHDMI, 1xVGA, 2xLan, 1xAudio, 6Xusb
- Dimension: 165mmx128mmx41mm

Specification:

NUC-61C3Z

| | | |
|-------------|--------------|---|
| Model No. | | NUC-61C3Z |
| Motherboard | Processor | Integrated Intel® Celeron® Processor 3855U 1.6GHz Dual Core processor |
| | Chipset | SoC |
| Display | Graphic card | Integrated Intel® HD Graphics 510, supporting DirectX 12 OpenGL 4.4, supporting VGA,HDMI sync/async display |
| | Resolution | VGA Max Resolution ratio: 1920X1200@60HZ, HDMI Max Resolution ratio: 4096X2304@24Hz |
| Storage | Memory | 1* DDR4 SODIMM memory slot, Max. 2133MHz, Max supports 16GB |
| | SATA | Supports 1* 2.5" HDD/SSD |
| | CF | N/A |
| | SSD | 1* M.2 slot, supporting M.2 2242 standard SSD |
| Sound | Audio chip | Integrated ALC662 6 channel high fidelity audio controller, supporting MIC/Line-out |
| Network | Ethernet | 2* Intel I211-AT GbE NIC controller, supporting Wake-on-LAN and PXE boot |
| | WIFI | 1* Mini-PCIE slot, supporting WIFI/3G module |
| Front I/O | Console | 1* CISCO standard console port |

| | | |
|------------------|---------------------|--|
| | USB | 2* USB2.0 ports, 2*USB3.0 ports |
| | Power Switch | 1*Power button |
| | LED | 1*HDD LED,1*POWER LED |
| | LAN | 2* RJ45 GbE Ethernet Ports |
| Rear I/O | Display Connector | 1* VGA,1* HDMI |
| | USB | 2*USB 2.0 ports |
| | Power | 1* 12V DC input port |
| | Antenna | 2* WIFI/3G SMA antenna(optional) |
| | Audio | 1* Line-out,1* MIC |
| Operating System | | Supports Windows 7, Windows 8, Windows 10, Linux, etc. |
| Power Supply | Input | AC 110V~ 220V |
| | Output | DC 12V/5A |
| | Type | Desktop Adapters |
| Chassis | Color | Silver Grey |
| | Dimension | 165mm*128mm*41mm (L*W*H) |
| | Structure | Fanless structure |
| | Material | All Aluminum |
| | Installing Method | Desktop or Wall Mount |
| Reliability | Working Temperature | 0°C ~ 45°C |
| | Storage Temperature | -20°C ~ 70°C |
| | Relative Humidity | 5%-95% Relative Humidity, non-condensing |
| | Working Vibration | 0.5g rms/5-500HZ/random/operating |

Ordering Information

| | Product Model | Processor | Motherboard | Memory | Storage | LAN | USB | WIFI | Riser card | OS |
|---|---------------|------------|---------------|--------|---------|------------|-----|------|------------|----|
| 1 | NUC-61C3Z | 3855U/1.6G | STX-N61_C321E | / | / | 2*WGI211AT | 6 | N/A | N/A | / |

Packing List

| | |
|---|--------------------------------|
| 1 | Desktop Adapter x 1 |
| 2 | Power cord 3P 180cm, China x 1 |
| 3 | VESA bracket x 1 |
| 4 | Accessory screw bag |

Optional Accessories

| | |
|---|--------------------------|
| 1 | Power cord 3P 180cm, USA |
|---|--------------------------|



www.armortec.net

Professional industrial PC and network appliance designer and manufacturer.

| | |
|---|-----------------------------|
| 2 | Power cord 3P 180cm, Europe |
| 3 | Power cord 3P 180cm, UK |
| 4 | Power cord 3P 180cm, Japan |
| 5 | Power cord 3P 180cm, India |

Contact:

Allen Dai / Sales Manager

Armortec Technology Limited

Email: allen.y.dai@armortec.net

Skype: allen.dai89

Tel: +86 150 1266 9595