



PMI-3110

Embedded PC, Aluminum Alloy Chassis ,Min-shell Design, Baytrail J1900 CPU,4*100M Port Switch



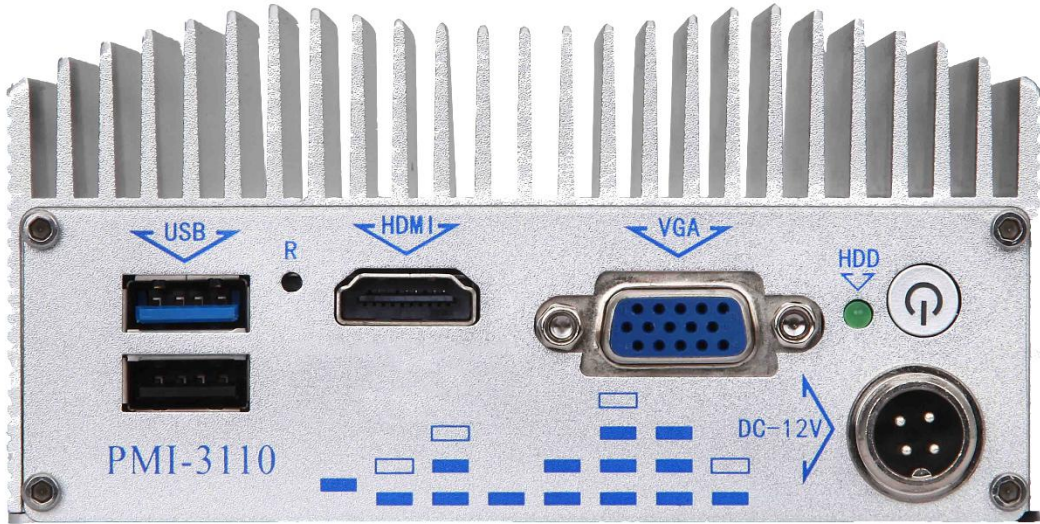

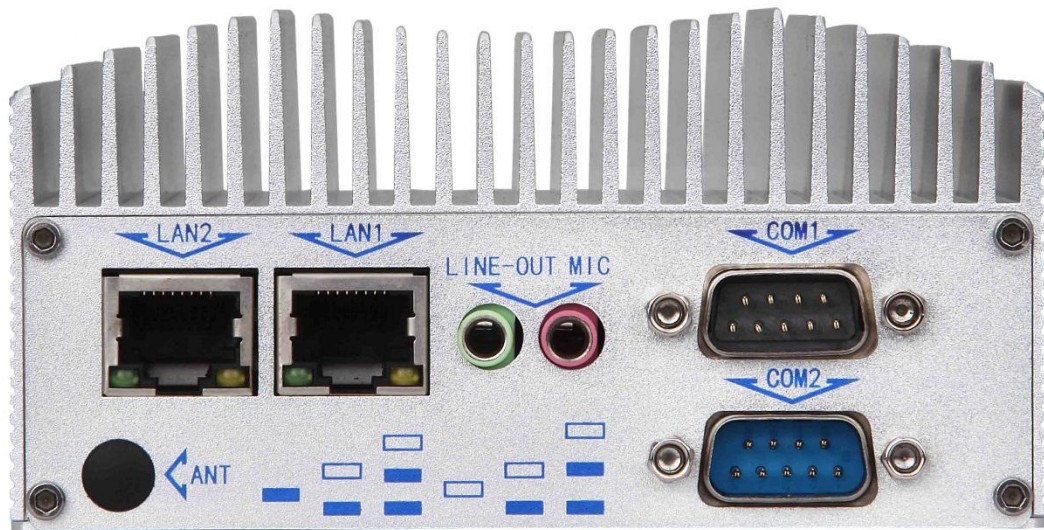



Feature :

- 1.Aluminum alloy Chassis, Fanless Cooling design
- 2.Intel Celeron J1900, up to 2.41GHz
- 3.1*DDR3 1333 MHz SODIMM ,MAX 8GB
- 4.4*100M port switch or dual Gigabit Ethernet ports
- 5.VGA&HDMI display
- 6.2*USB,2*COM, Audio
7. 1*mSATA, SATA2 3.0 Gbps
- 8.DC 12V input
- 9.Shock&Vibration resistance

Specification:

System	CPU	Intel Celeron J1900,2.0 to 2.41 GHz quad-core four thread processor,2M cache ,22nm,TDP 10W
	RAM	1*DDR3L 1333MHz SODIMM, up to 8 GB
	Expansion	2*MINI PCIe: one is PCIe1+USB signal(with SIM slot),the other is SATA2

		signal ,support mSATA disk
	Display	VGA&HDMI dual display interface, support synchronous or asynchronous display, support HDMI 4k HD decoding or 16 channel 1080p decoding
	DIO	8 bit (T002)
	Ethernet	4*RJ45 100M port switch, link to one Intel I210-IT network chipset (S001); Dual Intel I210-IT chipset, 2*RJ45 Gigabit connector(S002/T001/T002)
	SSD	1*mSATA, support 8GB to 256G mSATA disk
	USB	1*USB 3.0&1*USB 2.0(S001/S002/T002);1*USB 3.0&3*USB2.0(T001)
	COM	2*RS232, COM1 can be turning to Rs485(S002/T001);1*RS232(T002)
	Audio	Line-out &Mic(S002/T001/T002)
	LED	1*power light ,1*HDD light
	System Control	1*power switch ,1*rest switch
	Power	DC input: built-in DC-DC convert(default),input voltage :12V AC input: power adapter(option),input voltage :100VAC~240VAC@50~60Hz
	Watchdog	System timer reset/Interruption
	OS Support	Windows 7, Linux
	Optional	WIFI/3G/4G/BT
Mechanical & Environmental	Dimension	(W*H*D):111*144.5*56.1mm
	Operating temperature	-20C~70C-SSD with airflow; -10C~50C -HDD with airflow
	Storage Temperature	-40C~85C(-40 degree F~185degree F)
	Storage Humidity	5~90%@40C, non-condensing
	Vibration	5grms/5~500Hz/Random/in working status(CFD) 1grms/5~500Hz/Random/in working status HDD
	Shock	50gpeak acceleration(11ms duration)(CFD) ;20g peak acceleration (11ms duration) (HDD)
	EMC	CE/FCC Class A
	Net Weight	0.73kg
	Structure	Aluminum case wrinke shape for cooling, ultra-thin
	Mounting	VESA, desktop, DIN rail mounting

Ordering Info

Model NO.	Introductions
PMI-3110/S001	Embedded PC, Intel Celeron J1900 2.0 GH,4*100Mport switch, VGA/HDMI, Mini PCIe with SIM card ,2*USB,1*mSATA
PMI-3110/S002	Embedded PC, Intel Celeron J1900 2.0GHz,2*Gigabit Ethernet, VGA/HDMI, Mini PCIe with SIM card,2*COM,2*USB,1*Audio,2.5"HDD Bay
PMI-3110/T001	Embedded PC, Intel Celeron J1900 2.0 GHz,2*Gigabit Ethernet, VGA/HDMI ,Mini PCIe with SIM card,2*COM,4*USB,1*Audio,1*mSATA
PMI-3110/T002	Embedded PC, Intel Celeron J1900 2.0 GHz,2*Gigabit Ethernet, VGA/HDMI, Mini PCIe with SIM card ,1*COM,2*USB,1*Audio,8 bit DIO,2.5 inch HDD Bay
PA-60DC12	AC/DC power adapter ,DC 12V/5A 60W



Allen Dai

Sales Director

Sales Department, **Armortec Technology Limited**

p: +86 755 8935 8465 **m:** +86 15012669595

a: 4th Floor, Shenhai Building, Bulong Road, Minzhi Sub-district, Longhua District, Shenzhen, China

w: www.armortec.net **e:** allen.y.dai@armortec.net