



HTS-1321

High Toll Box Computer, Aluminum alloy chassis, Intel Atom E3845CPU,2*LAN,.10*COM,1*PCI/1*PCle



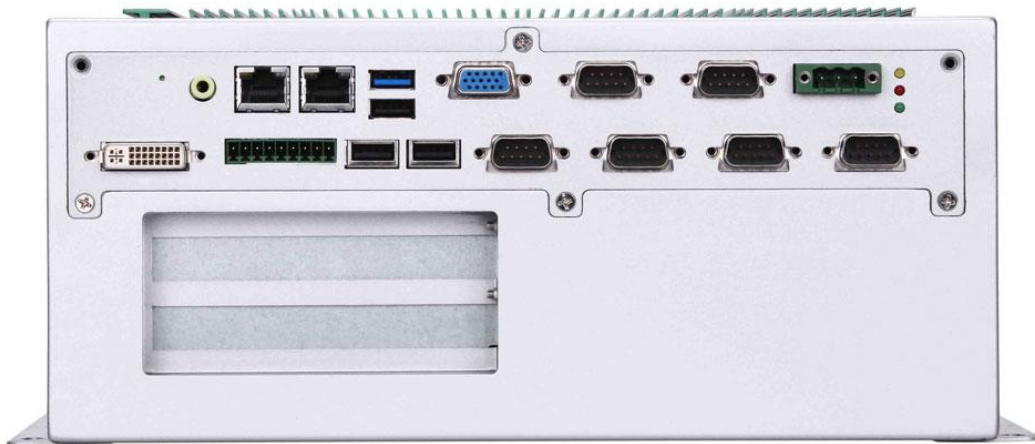

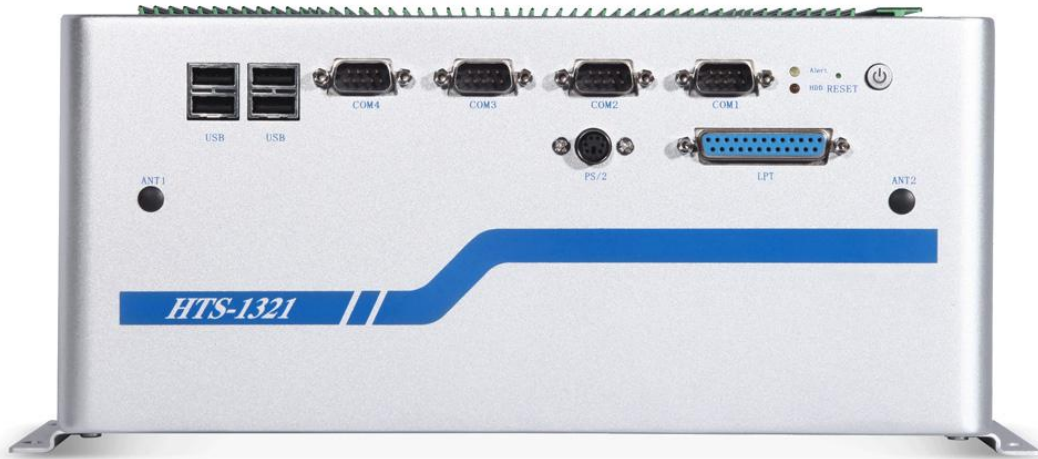



Feature :

1. Aluminum chassis, fanless design
2. Intel Atom E3845,1.91Ghz
3. 2*DDR3/DDR3L 1333MHz SODIMM, Max 8GB
4. 1* PCIe(X1)+1*PCI or 2*PCI;1*Mini PCIe
5. 2*LAN,10*COM,8*USB, 8 bit DIO
6. 1*LPT,1*PS2, Audio
7. VGA&DVI-D display
8. mSATA+2*2.5" SATA Bay
9. DC 9~36V power input
10. Shock& Vibration resistance

Specification:

System	CPU	Intel Atom E3845,1.91Ghz, 4cores,4threads,2M cache,22 nm, TDP 10W
--------	-----	---

	System Memory	2*DDR3L 1333MHz SODIMM, Max 8GB
	Expansion	1* PCIe+1*PCIe X1 or 2*PCI,1*Mini PCIe,PCIeX1+USB signal and optional mSATA
	Display	VGA&DVI-D dual display, support asynchronous double synchronous display, DVI support 2k 16 road 1080p HD decoding broadcast or decoding
	Ethernet	2*RJ45, Intel WGI210-AT dual Gigabit net chipset
	Audio	Line-out, Realtek ALC888 chipset
	Storage	Optional 1*Msata,2*2.5" HDD Bay ,CF card
	Mouse/Keyboard	PS/2 (with Y-splitter cable)
	System control	1* power switch, 1*Reset switch
	Power	DC input: built-in DC-DC convert(default),input voltage :DC 9~36V,TDP 12V/1.2 A(2.5"HDD Bay) Typical :12V/0.75A(2.5"HDD Bay) AC input: power adapter (Option), input voltage: 100VAC~240VAC @50~60Hz
	Optional	WIFI, Bluetooth
	LED	1* power LED,1*HDD LED
	USB	1*USB 3.0,7*USB 2.0,1*USB 2.0 Built-in
	Parallel Port	1*LTP (Support ECP/EPP/SPP mode) DB25 female port
	DIO	8 bit
	COM	2*RS232/8*RS232/422/485, RS485 support auto flow control, DB9 male port
	Watchdog Timer	System timeout programmable via software from 1 to 255 seconds
	OS	Windows 7, Windows 8, Linux Fedora, Ubuntu
Mechanical & Environmental	Dimension	(W*H*D:280*211.8* 127.8 mm
	Operating temperature	-20C~70C-SDD with airflow; -10C~50C-HDD with airflow
	Storage Temperature	-40C~85C(-40F~185F)
	Storage Humidity	5~90%@40C,non-condensing
	Vibration	5grms/5~500Hz/Random/in working status(CFD) 1grms/5~500Hz/Random/in working

		status HDD
	Shock	50gpeak acceleration(11ms duration)(CFD) (20g peak acceleration (11ms duration) (HDD)
	EMC	CE/FCC Class A
	Net Weight	3.2kg
	Structure	Aluminum case, wrinkle shape for cooling
	Mounting	desktop

Ordering Info

Model NO.	Introductions
HTS-1321/S001	Embedded PC, Intel Atom E3845,1.9 1Ghz,2*LAN,10*COM (8*RS232/422/485are optional),8*USB, Audio,8bit DIO,Ps2, LPT
PA-12DC19	AC/DC power adapter, DC19V/6.32A 120W

Packing List

1	SATA data cable
2	SATA power cable
3	Power cord 3P 180cm, China
4	Rack ears
5	Accessory screw bag

Optional Accessories

1	Power cord 3P 180cm, USA
2	Power cord 3P 180cm, Europe
3	Power cord 3P 180cm, UK
4	Power cord 3P 180cm, Japan

5	Power cord 3P 180cm, India



Allen Dai

Sales Director

Sales Department, **Armortec Technology Limited**

p: +86 755 8935 8465 **m:** +86 15012669595

a: 4th Floor, Shenhai Building, Bulong Road, Minzhi Sub-district, Longhua District, Shenzhen, China

w: www.armortec.net **e:** allen.y.dai@armortec.net