



## EMC TEST REPORT

EN 55032:2015+AC:2016

EN 55024: 2010+A1: 2015

EN 61000-3-2: 2014

EN 61000-3-3: 2013

### MEASUREMENT AND TEST REPORT

For

**Armortec Technology Limited**

6<sup>th</sup> Floor, Building F1, Jinyucheng Industrial Park, Zhonghao 2<sup>nd</sup> Road, Bantian County, Longgang District, Shenzhen, China.

#### Model:

NC-334R, ATL-612N4, ATL-C236N4, FW-2361-2O(N), FW-2381-2N, FW-8764-2O, FW-8010, FW-8210, FWA-1781-4O, FWA-8781-4O, FW-B158-4O, FWC-6761, FWD-BT61, FWF-BT41, NC-3860, NC-4010, NC-6010, NC-8210, NC-C362, NCC-BT41S2

December 04, 2019

<b>This report concerns:</b> <input checked="" type="checkbox"/> Original Report	<b>Equipment Type:</b> NETWORK APPLIANCE
<b>Test Engineer:</b> <u>Eric /</u>	
<b>Report Number:</b> <u>TH19KR-2197E</u>	
<b>Test Date:</b> <u>December 02~04, 2019</u>	
<b>Reviewed By:</b> <u>Prince/</u>	
<b>Approved By:</b> <u>Prince/</u>	
<b>Prepared By:</b> <b>Shenzhen Tian Hai Test Technology Co., Ltd.</b> 4F, A3 BLDG, The Silicon Valley Power intelligent terminal industrial park, Guanlan street, Longhua district, Shenzhen Tel: +86-755-86615100 Fax: +86-755-86615105	

**Note:** This test report is limited to the above client company and the product model only. It may not be duplicated without prior written consent of Shenzhen Tian Hai Test Technology Co., Ltd.



**TABLE OF CONTENTS**

**1 - GENERAL INFORMATION..... 4**

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... 4

1.2 TEST STANDARDS..... 4

1.3 TEST SUMMARY..... 5

1.4 TEST METHODOLOGY..... 5

1.5 TEST EQUIPMENT LIST AND DETAILS..... 6

**2 - SYSTEM TEST CONFIGURATION..... 7**

2.1 JUSTIFICATION..... 7

2.2 EUT EXERCISE SOFTWARE..... 7

2.3 SPECIAL ACCESSORIES..... 7

2.4 BASIC CONFIGURATION OF TEST SYSTEM..... 7

2.5 TEST SETUP DIAGRAM..... 7

**3 - DISTURBANCE VOLTAGE AT THE MAINS TERMINALS..... 8**

3.1 MEASUREMENT UNCERTAINTY..... 8

3.2 LIMIT OF DISTURBANCE VOLTAGE AT THE MAINS TERMINALS (CLASS B)..... 8

3.3 EUT SETUP..... 8

3.4 INSTRUMENT SETUP..... 8

3.5 TEST PROCEDURE..... 9

3.6 SUMMARY OF TEST RESULTS..... 9

3.7 DISTURBANCE VOLTAGE TEST DATA..... 9

3.8 TEST RESULT..... 9

**4 - RADIATED DISTURBANCES..... 12**

4.1 MEASUREMENT UNCERTAINTY..... 12

4.2 LIMIT OF RADIATED DISTURBANCES (CLASS B)..... 12

4.3 EUT SETUP..... 12

4.4 TEST RECEIVER SETUP..... 12

4.5 TEST PROCEDURE..... 13

4.6 CORRECTED AMPLITUDE & MARGIN CALCULATION..... 13

4.7 RADIATED EMISSIONS TEST RESULT..... 13

4.8 TEST RESULT..... 13

**5 - HARMONIC CURRENT TEST (EN 61000-3-2)..... 16**

5.1 APPLICATION OF HARMONIC CURRENT EMISSION..... 16

5.2 MEASUREMENT DATA..... 16

5.3 TEST RESULTS..... 16

**6 - VOLTAGE FLUCTUATIONS AND FLICKER TEST (EN 61000-3-3)..... 17**

6.1 APPLICATION OF VOLTAGE FLUCTUATIONS AND FLICKER TEST..... 17

6.2 MEASUREMENT DATA..... 17

6.3 TEST RESULTS..... 17

**7 - EN 55024 TEST PROCEDURES..... 18**

7.1 ELECTROSTATIC DISCHARGE TEST SYSTEM..... 18

7.2 RADIATED SUSCEPTIBILITY TEST SYSTEM..... 18

7.3 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST SYSTEM..... 18

7.4 SURGE IMMUNITY TEST SYSTEM..... 18

7.5 CONDUCTED SUSCEPTIBILITY TEST SYSTEM..... 18

7.6 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST SYSTEM..... 18

7.7 VOLTAGE DIPS, SHORT INTERRUPTIONS IMMUNITY TESTS SYSTEM..... 18

7.8 EQUIPMENT TEST TABLE..... 19

7.9 INSTRUMENT CALIBRATION..... 19

**8 - EN 55024 TEST PROCEDURES..... 20**

8.1 EUT AND CABLE PLACEMENT..... 20

8.2 APPLICATION OF ELECTROSTATIC DISCHARGE IMMUNITY TEST..... 20

8.3 APPLICATION OF RADIATED SUSCEPTIBILITY TEST..... 20

8.4 APPLICATION OF ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST..... 20

8.5 APPLICATION OF SURGE IMMUNITY TEST..... 20

8.6 APPLICATION OF CONDUCTED SUSCEPTIBILITY TEST..... 20

8.7 APPLICATION OF POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST.....	21
8.8 APPLICATION OF VOLTAGE DIPS, SHORT INTERRUPTIONS IMMUNITY TESTS .....	21
8.9 DEVIATIONS FROM THE STANDARD.....	21
<b>9 - TEST DATA.....</b>	<b>22</b>
9.1 ELECTROSTATIC DISCHARGE IMMUNITY TEST (IEC 61000-4-2).....	22
9.2 RADIATED SUSCEPTIBILITY TEST(IEC 61000-4-3).....	23
9.3 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (IEC 61000-4-4) .....	23
9.4 SURGE IMMUNITY TEST (IEC 61000-4-5).....	24
9.5 CONDUCTED SUSCEPTIBILITY TEST (IEC 61000-4-6).....	24
9.6 VOLTAGE DIPS, SHORT INTERRUPTIONS IMMUNITY TESTS (IEC 61000-4-11) .....	25
<b>10 - TEST RESULTS .....</b>	<b>26</b>
10.1 IEC 61000-4-2 ELECTROSTATIC DISCHARGE IMMUNITY TEST CONFIGURATION .....	26
10.2 IEC 61000-4-3 RADIATED SUSCEPTIBILITY TEST CONFIGURATION .....	26
10.3 IEC 61000-4-4 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST CONFIGURATION .....	26
10.4 IEC 61000-4-5 SURGE IMMUNITY TEST CONFIGURATION.....	26
10.5 IEC 61000-4-6 CONDUCTED SUSCEPTIBILITY TEST CONFIGURATION.....	26
10.6 IEC 61000-4-11 VOLTAGE DIPS, SHORT INTERRUPTIONS IMMUNITY TESTS CONFIGURATION.....	26
<b>APPENDIX A - PRODUCT LABELING .....</b>	<b>27</b>
CE MARKING LABEL SPECIFICATION .....	27
PROPOSED LABEL LOCATION ON EUT .....	27
<b>APPENDIX B - EUT PHOTOGRAPHS.....</b>	<b>28</b>
<b>APPENDIX C - TEST SETUP PHOTOGRAPHS .....</b>	<b>32</b>

# 1 - GENERAL INFORMATION

## 1.1 Product Description for Equipment Under Test (EUT)

### Client Information

Applicant: **Armortec Technology Limited**

Address of applicant: 6th Floor, Building F1, Jinyucheng Industrial Park, Zhonghao 2<sup>nd</sup> Road, Bantian County, Longgang District, Shenzhen, China.

Manufacturer: **Armortec Technology Limited**

Address of manufacturer: 6th Floor, Building F1, Jinyucheng Industrial Park, Zhonghao 2<sup>nd</sup> Road, Bantian County, Longgang District, Shenzhen, China.

### General Description of E.U.T

EUT Description: **NETWORK APPLIANCE**

Model No.: NC-334R, ATL-612N4, ATL-C236N4, FW-2361-2O(N), FW-2381-2N, FW-8764-2O, FW-8010, FW-8210, FWA-1781-4O, FWA-8781-4O, FW-B158-4O, FWC-6761, FWD-BT61, FWF-BT41, NC-3860, NC-4010, NC-6010, NC-8210, NC-C362, NCC-BT41S2

Rating: Input: DC 5V,50Hz,2A,10W

Note: All tests performed on: NC-334R.

Trademark:

The logo for Armortec, featuring the word "ARMORTEC" in white, uppercase letters on a dark blue rectangular background.

Remark: \* The test data gathered are from the production sample provided by the manufacturer.

## 1.2 Test Standards

The following Declaration of Conformity report of EUT is prepared in accordance with

EN 55032:2015+AC:2016

EN 55024: 2010+A1: 2015

EN 61000-3-2: 2014

EN 61000-3-3: 2013

The objective of the manufacturer is to demonstrate compliance with the described standards above.



### 1.3 Test Summary

For the EUT described above. The standards used were EN 55032 Class B for Emissions & EN 55024 for Immunity.

Table 1 : Tests Carried Out Under EN 55032:2015+AC:2016

Standard	Test Items	Status
EN55032:2015+AC:2016	Disturbance Voltage at The Mains Terminals (0.15MHz To 30MHz)	√
	Radiated Disturbances (30MHz To 1000MHz)	√

- √ Indicates that the test is applicable
- × Indicates that the test is not applicable

Table 2 : Tests Carried Out Under EN 61000-3-2: 2014/ EN 61000-3-3: 2013

Standard	Test Items	Status
EN 61000-3-2: 2014	Harmonic Current Test	√
EN 61000-3-3: 2013	Voltage Fluctuations and Flicker Test	√

- √ Indicates that the test is applicable
- × Indicates that the test is not applicable

Table 3 : Tests Carried Out Under EN 55032:2015+AC:2016

Standard	Test Items	Status
EN61000-4-2:2009	Electrostatic discharge Immunity	√
EN 61000-4-3:2006+A1:2008 +A2:2010	Radiated Susceptibility (80MHz to 1GHz)	√
EN61000-4-4:2004+A1:2010	Electrical Fast Transient/Burst Immunity	√
EN61000-4-5:2006	Surge Immunity	√
EN61000-4-6:2009	Conducted Susceptibility (150kHz to 80MHz)	√
EN61000-4-8:2010	Power Frequency Magnetic Field Immunity (50/60Hz)	X
EN61000-4-11:2004	Voltage Dips, Short Interruptions Immunity	√

- √ Indicates that the test is applicable
- × Indicates that the test is not applicable

### 1.4 Test Methodology

All measurements contained in this report were conducted with CISPR 16-1: 2002, radio disturbance and immunity measuring apparatus, and CISPR16-2: 2002, Method of measurement of disturbances and immunity





**1.5 Test Equipment List and Details**

No.	Equipment	Manufacturer	Model No.	S/N	Calculator date	Calculator due date
1	EMI Test Receiver	R&S	ESCI	100687	2019-03-15	2020-03-14
2	EMI Test Receiver	R&S	ESPI	100097	2019-03-15	2020-03-14
3	Amplifier	HP	8447D	1937A02492	2019-03-15	2020-03-14
4	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	7101	2019-03-15	2020-03-14
5	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	7102	2019-03-15	2020-03-14
6	Power Clamp	SCHWARZ BECK	MDS-21	3812	2019-03-15	2020-03-14
7	Positioning Controller	C&C	CC-C-1F	MF7802113	N/A	N/A
8	Electrostatic Discharge Simulator	TESEQ	NSG437	125	2019-03-15	2020-03-14
9	Fast Transient Burst Generator	SCHAFFNER	MODULA6150	34572	2019-03-15	2020-03-14
10	Fast Transient Noise Simulator	Noiseken	FNS-105AX	31485	2019-03-15	2020-03-14
11	Color TV Pattern Generator	PHILIPS	PM5418	TM209947	N/A	N/A
12	Power Frequency Magnetic Field Generator	EVERFINE	EMS61000-8K	608002	2019-03-15	2020-03-14
13	Capacitive Coupling Clamp	TESEQ	CDN8014	25096	2019-03-15	2020-03-14
14	High Field Biconical Antenna	ELECTROMETRICS	EM-6913	166	2019-03-15	2020-03-14
15	Log Periodic Antenna	ELECTROMETRICS	EM-6950	811	2019-03-15	2020-03-14
16	Remote Active Vertical Antenna	ELECTROMETRICS	EM-6892	304	2019-03-15	2020-03-14
17	TRILOG Broadband Test-Antenna	SCHWARZ BECK	VULB9163	9163-324	2019-03-15	2020-03-14
18	Horn Antenna	SCHWARZ BECK	BBHA9120A	B08000991-0001	2019-03-15	2020-03-14
19	Teo Line Single Phase Module	SCHWARZ BECK	NSLK8128	D-69250	2019-03-15	2020-03-14
20	Electricity bridge	Zentech	100 LCR METER	803024	2019-03-15	2020-03-14
21	RF Current Probe	FCC	F-33-4	80	2019-03-15	2020-03-14
22	Signal Generator	HP	8647A	3349A02296	2019-03-15	2020-03-14
23	Microwave Amplifier	HP	8349B	2627A00994	2019-03-15	2020-03-14
24	Triple-Loop Antenna	EVERFINE	LLA-2	607004	2019-03-15	2020-03-14



## 2 - SYSTEM TEST CONFIGURATION

### 2.1 Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

### 2.2 EUT Exercise Software

The EUT exercising program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The software offered by manufacture, can let the EUT being normal operation.


### 2.3 Special Accessories

As shown in section 2.5, interface cable used for compliance testing is shielded as normally supplied by TH and its respective support equipment manufacturers.


### 2.4 Basic Configuration of Test System

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

Immunity: The equipment under test (EUT) was configured to the representative operating mode and conditions.

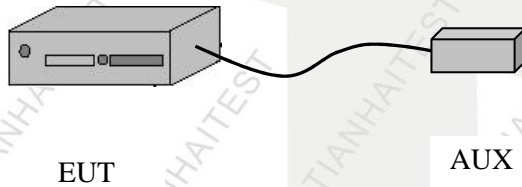

### 2.5 Test Setup Diagram

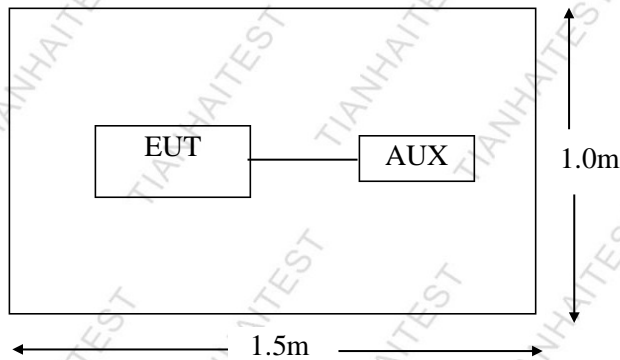



### 3 - DISTURBANCE VOLTAGE AT THE MAINS TERMINALS

#### 3.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is 3.4 dB.

#### 3.2 Limit of Disturbance Voltage At The Mains Terminals (Class B)

Frequency Range (MHz)	Limits ( dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

Note: (1)The tighter limit shall apply at the edge between two frequency bands.

#### 3.3 EUT Setup

The setup of EUT is according with CISPR 16-1: 2002, CISPR16-2: 2002 measurement procedure. The specification used was the EN 55022 limits.

The EUT was placed center and the back edge of the test table.

The AV cables were draped along the test table and bundled to 30-40cm in the middle.

The spacing between the peripherals was 10 cm.

Maximum emission emitted from EUT was determined by manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation and the levels in the final result of the test were recorded with the EUT running in the operating mode that maximum emission was emitted.

#### 3.4 Instrument Setup

The test receiver was set with the following configurations:

Test Receiver Setting:

Frequency Range.....150 KHz to 30 MHz  
 Detector.....Peak & Quasi-Peak & Average  
 Sweep Speed.....Auto  
 IF Band Width.....9 KHz





### 3.5 Test Procedure

During the conducted emission test, the EUT power cord was connected to the auxiliary outlet of the first Artificial Mains.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance using all installation combination.

All data was recorded in the peak detection mode. Quasi-peak and Average readings were only performed when an emission was found to be marginal (within -10 dB $\mu$ V of specification limits). Quasi-peak readings are distinguished with a "QP". Average readings are distinguished with a "AV".

### 3.6 Summary of Test Results

According to the data in section 3.6, the EUT complied with the EN 55032 Conducted margin, which represented the worst margin reading.

### 3.7 Disturbance Voltage Test Data

Temperature ( °C )	15~35
Humidity ( %RH )	30~60
Barometric Pressure ( mbar )	860~1060
EUT	NETWORK APPLIANCE
M/N	NC-334R
Operating Mode	ON

Test data see following pages


### 3.8 Test Result

**PASS**



## Disturbance Voltage Test Data

EUT: NETWORK APPLIANCE M/N: NC-334R  
 Operating Condition: ON  
 Test Site: Shielded Room  
 Operator: Eric  
 Test Specification: DC 5V,50Hz,2A,10W  
 Comment: Live Line Tem:24°C Hum:60%

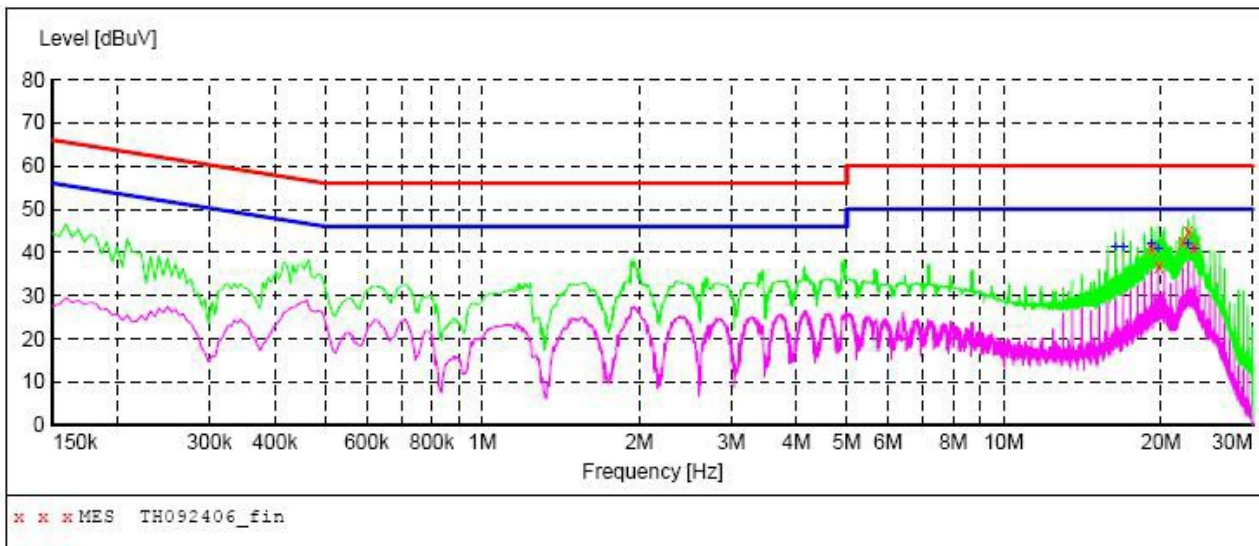


Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
19.190000	40.80	12.9	60	19.2	QP	L1	GND
19.825000	36.90	12.8	60	23.1	QP	L1	GND
22.005000	42.40	12.4	60	17.6	QP	L1	GND
22.570000	44.80	12.3	60	15.2	QP	L1	GND
23.140000	41.10	12.2	60	18.9	QP	L1	GND
Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
16.365000	41.00	13.4	50	9.0	AV	L1	GND
16.930000	41.20	13.3	50	8.8	AV	L1	GND
19.185000	41.80	12.9	50	8.2	AV	L1	GND
19.750000	40.60	12.8	50	9.4	AV	L1	GND
22.570000	42.10	12.3	50	7.9	AV	L1	GND
23.135000	40.90	12.2	50	9.1	AV	L1	GND



## Disturbance Voltage Test Data

EUT: NETWORK APPLIANCE M/N: NC-334R  
 Operating Condition: ON  
 Test Site: Shielded Room  
 Operator: Eric  
 Test Specification: DC 5V,50Hz,2A,10W  
 Comment: Neutral Line Tem: 24°C Hum:60%

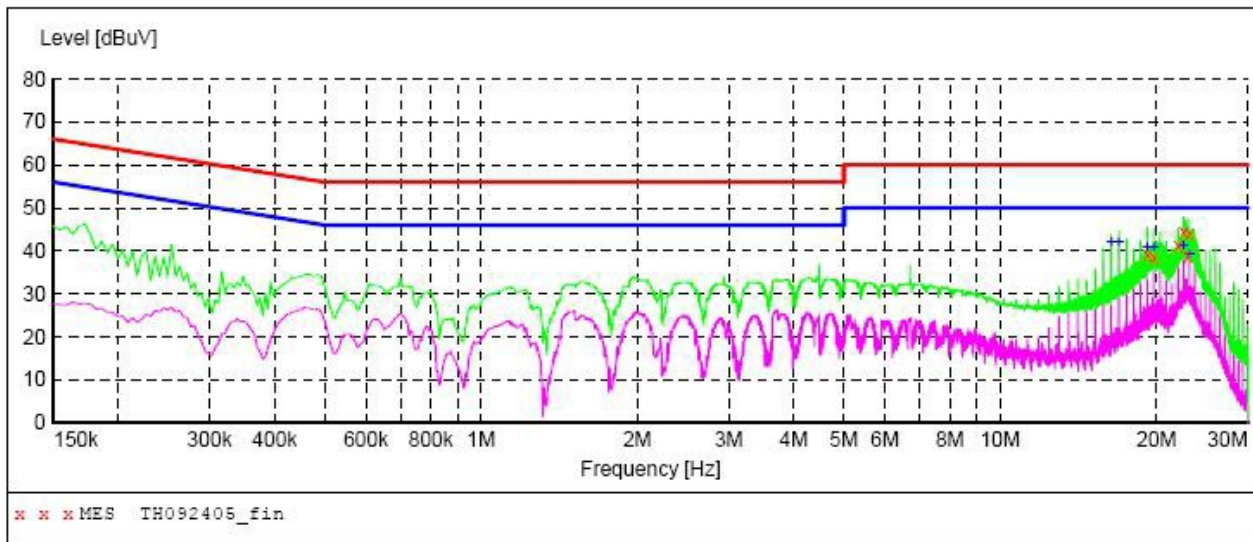

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
19.185000	39.30	12.9	60	20.7	QP	N	GND
19.750000	38.50	12.8	60	21.5	QP	N	GND
22.005000	41.00	12.4	60	19.0	QP	N	GND
22.565000	44.30	12.3	60	15.7	QP	N	GND
22.950000	38.90	12.2	60	21.1	QP	N	GND
23.130000	44.00	12.2	60	16.0	QP	N	GND

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
16.360000	42.10	13.4	50	7.9	AV	N	GND
16.925000	41.80	13.3	50	8.2	AV	N	GND
19.180000	40.90	12.9	50	9.1	AV	N	GND
19.745000	40.90	12.8	50	9.1	AV	N	GND
22.565000	41.20	12.3	50	8.8	AV	N	GND
23.130000	39.20	12.2	50	10.8	AV	N	GND





## 4 - RADIATED DISTURBANCES

### 4.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is  $\pm 4.0$  dB.

### 4.2 Limit of Radiated Disturbances (Class B)

Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dB $\mu$ V/m)
30 ~ 230	3	40
230 ~ 1000	3	47

Note: (1) The tighter limit shall apply at the edge between two frequency bands.

(2) Distance refers to the distance in meters between the test instrument antenna and the closest point of any part of the E.U.T.

### 4.3 EUT Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup accordance with the CISPR 16-1: 2002, CISPR16-2: 2002. The specification used was EN 55022 Class B limits.

The EUT was placed on the center of the test table.

Maximum emission emitted from EUT was determined by manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation and the levels in the final result of the test were recorded with the EUT running in the operating mode that maximum emission was emitted.

### 4.4 Test Receiver Setup

According to EN 55013 rules, the frequency was investigated from 30 to 1000 MHz. During the radiated emission test, the test receiver was set with the following configurations:

Test Receiver Setting:

Detector.....Peak & Quasi-Peak  
 IF Band Width.....120KHz  
 Frequency Range.....30MHz to 1000MHz  
 Turntable Rotated.....0 to 360 degrees

Antenna Position:

Height.....1m to 4m  
 Polarity.....Horizontal and Vertical





## 4.5 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the peak detection mode. Quasi-peak readings performed only when an emission was found to be marginal (within -10 dB $\mu$ V of specification limits), and are distinguished with a "QP" in the data table.

## 4.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB $\mu$ V means the emission is 7dB $\mu$ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Class B Limit} - \text{Corr. Ampl.}$$

## 4.7 Radiated Emissions Test Result

Temperature ( °C )	15~35
Humidity ( %RH )	30~60
Barometric Pressure ( mbar )	860~1060
EUT	NETWORK APPLIANCE
M/N	NC-334R
Operating Mode	ON


## 4.8 Test Result

**PASS**



## Radiated Emission Test Data

EUT: NETWORK APPLIANCE M/N: NC-334R  
 Operating Condition: ON  
 Test Site: 3m CHAMBER  
 Operator: Eric  
 Test Specification: DC 5V,50Hz,2A,10W  
 Comment: Polarizations: Horizontal Tem:24°C Hum:60%

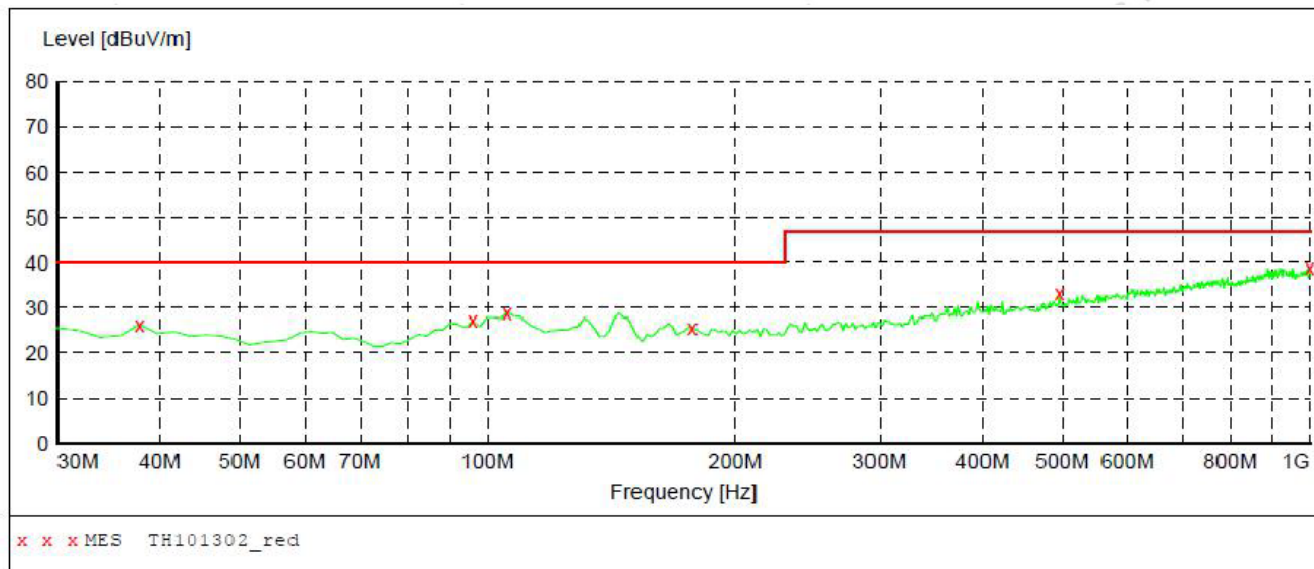


Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
37.760000	26.40	12.3	40.0	13.6	---	100.0	0.00	HORIZONTAL
95.960000	27.10	15.2	40.0	12.9	---	100.0	0.00	HORIZONTAL
105.660000	29.00	15.7	40.0	11.0	---	300.0	0.00	HORIZONTAL
177.440000	25.70	12.9	40.0	14.3	---	100.0	0.00	HORIZONTAL
495.600000	33.10	20.2	47.0	13.9	---	100.0	0.00	HORIZONTAL
998.060000	39.00	25.9	47.0	8.0	---	100.0	0.00	HORIZONTAL



## Radiated Emission Test Data

EUT: NETWORK APPLIANCE M/N: NC-334R  
 Operating Condition: ON  
 Test Site: 3m CHAMBER  
 Operator: Eric  
 Test Specification: DC 5V,50Hz,2A,10W  
 Comment: Polarizations: Vertical Tem: 24°C Hum:60%

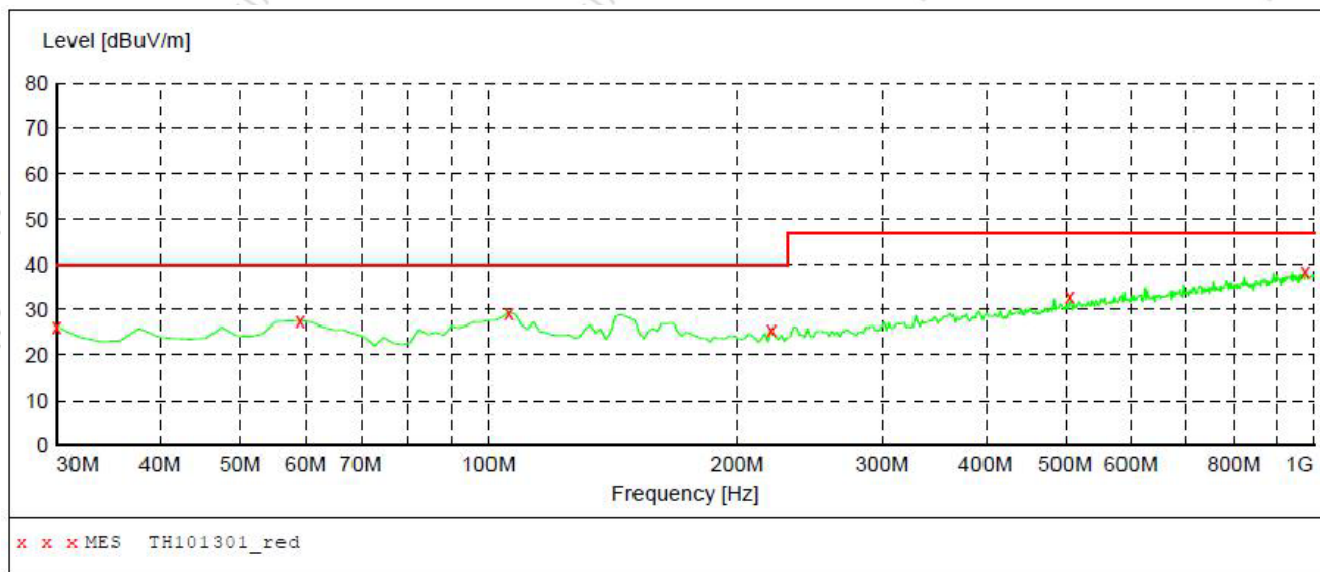

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	26.30	14.1	40.0	13.7	---	100.0	0.00	VERTICAL
59.100000	27.60	13.1	40.0	12.4	---	100.0	0.00	VERTICAL
105.660000	29.30	15.7	40.0	10.7	---	100.0	0.00	VERTICAL
220.120000	25.50	13.8	40.0	14.5	---	100.0	0.00	VERTICAL
505.300000	32.90	20.4	47.0	14.1	---	100.0	0.00	VERTICAL
974.780000	38.50	26.0	47.0	8.5	---	100.0	0.00	VERTICAL





## 5 - HARMONIC CURRENT TEST (EN 61000-3-2)

### 5.1 Application of Harmonic Current Emission

Compliance to these standards ensures that tested equipment will not generate harmonic currents at levels that cause unacceptable degradation of the main environment. This directly contributes to meeting compatibility levels established in other EMC standards, which defines compatibility levels for low-frequency conducted disturbances in low-voltage supply systems.

### 5.2 Measurement Data

Note: For detailed test data, refer to the following pages:

Standard used:	EN/IEC 61000-3-2 A14 (2006) Quasi-stationary - Equipment class A
Observation time:	150s
E. U. T	NETWORK APPLIANCE
M/N	NC-334R
Operation Mode	--

### 5.3 Test Results

This EUT is deemed to comply with the requirements of EN 61000-3-2: 2014 without test since the power of EUT is less than 75W.





## 6 - VOLTAGE FLUCTUATIONS AND FLICKER TEST (EN 61000-3-3)

### 6.1 Application of Voltage Fluctuations and Flicker Test

Compliance to these standards ensures that tested equipment will not generate flickers and voltage change at levels that cause unacceptable degradation of the main environment. This directly contributes to meeting compatibility levels established in other EMC standards, which defines compatibility levels for low-frequency conducted disturbances in low-voltage supply systems.

### 6.2 Measurement Data

Note: For detailed test data, refer to the following pages:

Standard used:	EN/IEC 61000-3-3 Flicker
Short time (Pst):	10 min
Observation time:	10 min (1 Flicker measurement)
Flickermeter:	230V/50Hz
E. U. T.:	NETWORK APPLIANCE
M/N	NC-334R
Operation Mode	--

Test Result : PASS

### Maximum Flicker results

	EUT values	Limit	Result
Pst	0.198	1.00	PASS
dc [%]	0.031	3.30	PASS
dmax [%]	2.220	4.00	PASS
dt [s]	0.000	0.50	PASS

### 6.3 Test Results

The EUT was subjected to the voltage fluctuations and flicker test required by EN 61000-3-3: 2013.



## 7 - EN 55024 TEST PROCEDURES

---

### 7.1 Electrostatic Discharge Test System

An EM TEST DITOC0103Z ESD simulator is used for all testing. It is capable of applying Electrostatic discharges in both contact discharge modes to 4 kV and air discharge modes to 8 kV in both positive and negative polarities. This is in accordance with the IEC 61000-4-2 basic EMC publication.

### 7.2 Radiated Susceptibility Test System

An IFR 2032 signal generator and a Amplifier Research power amplifier are used to provide a signal at the appropriate power and frequency to a transmitting antenna to obtain the required electromagnetic field at the position of the EUT in accordance with the IEC 61000-4-3 basic EMC publication. The field was monitored by Amplifier Research field probe and Amplifier Research PM2002 power meter according the IEC 61000-4-3 standards. In order to judge the performance of the EUT, a set of monitor system is used.

### 7.3 Electrical Fast Transient/Burst Immunity Test System

An EM Test UCS 500-M6 Immunity test system is used for all testing. It is capable of applying fast transients to the AC line at any phase angle with respect to the AC line voltage wave form and to attached cables via a capacitive coupling clamp in accordance with the IEC 61000-4-4 basic EMC publication.

### 7.4 Surge Immunity Test System

An EM Test UCS 500-M6 Immunity test system is used for all testing. Both positive and negative polarities of voltage up to 2kV were applied to the AC input lines. The coupling network defined in the standard was used.

### 7.5 Conducted Susceptibility Test System

An IFR 2032A signal generator and a set of Amplifier Research test system are used for the testing. EUT was tested from 0.15 MHz to 80 MHz with 1kHz sine wave, 80% modulation with 3Vr.m.s. CDN coupling and de-coupling networks and EM clamp was tested. During the tests, injected was applied to power line by using CDNs-6.2.2 method, and I/O lines was injected by using EM clamp injection-6.2.3.method.

### 7.6 Power Frequency Magnetic Field Immunity Test System

An EM Test UCS 500-M6 Immunity test system is used for all testing. Test level as described in IEC 61000-4-8 titled "Table 1 – Test Levels for continuous field" was chosen. Single turn induction coil in 1m x 1m size was used to generate the magnetic field.

### 7.7 Voltage Dips, Short Interruptions Immunity Tests System

An EM Test UCS 500-M6 Immunity test system is used for all testing. Test level as described in IEC 61000-4-11, section 5, titled "Test Levels".



## 7.8 Equipment Test Table

IEC 61000-4-2: 1995 specifies that a tabletop EUT shall be placed on a non-conducting table which is 80 centimeters above a ground reference plane and that floor mounted equipment shall be placed on a insulating support approximately 10 centimeters above a ground plane. During the tests, the EUT is positioned over a ground reference plane in conformance with this requirement.

For tabletop equipment, a 1.6 by 0.8-meter metal sheet (HCP) is placed on the table and connected to the ground plane via a metal strap with two 470 k Ohms resistors in series. The EUT and attached cables are isolated from this metal sheet by 0.5-millimeter thick insulating material. A Vertical Coupling Plane (VCP) grounded on the ground plane through the same configuration as in the HCP is used.

IEC 61000-4-3 and IEC 61000-4-4 specify that a tabletop EUT be placed on a non-conducting table 80 centimeters above a ground reference plane and that floor-mounted equipment shall be placed on an insulating support approximately 10 centimeters above a ground plane. During the IEC 61000-4-3 tests, the EUT is positioned on a table in a shielded semi-anechoic test chamber to reduce reflections from the internal surfaces of the chamber. During the IEC 61000-4-4 tests, the EUT is positioned on a table over a ground reference plane in conformance with this requirement.

## 7.9 Instrument Calibration

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications.

Extensive engineering efforts have been made to ensure test data reliability through Quality Control and regular equipment calibration schedules. However, the application of radio frequency fields and voltages are not without an unavoidable level of uncertainty. These include inaccuracies in antenna factors, chamber imperfections and possible test generator output uncertainties.





## 8 - EN 55024 TEST PROCEDURES

---

### 8.1 EUT and Cable Placement

The EUT and any peripherals are located at the center of the table for tabletop devices and in the center of the ground plane with the insulating support for floor-standing devices. The standards require that interconnecting cables to be connected to available ports of the unit and that the placement of the unit and the attached cables simulate a typical installation so far as to be practical.

### 8.2 Application of Electrostatic Discharge Immunity Test

The test is conducted in the following order according to the basic standard IEC 61000-4-2: Air Discharge, Direct Contact Discharge, Indirect Contact Horizontal Coupling Plane Discharge, and Indirect Contact Vertical Coupling Plane Discharge. The Electrostatic Discharge test levels are set and discharges for the different test modes are set appropriately. The Electrostatic Discharge is applied to the conductive surface of the computer in which the EUT is enclosed, and along all seams and control surfaces on the computer. When a discharge occurs and an error is caused, the type of error, discharge level and location is recorded.

### 8.3 Application of Radiated Susceptibility Test

The electromagnetic field is established at the front edge of the EUT. The frequency range is swept from 80 to 1000 MHz using a power level necessary to obtain a 3 volt/meter and 80% amplitude of a 1 kHz sine wave modulated field Strength is directed at the EUT. The test is performed with each of four sides of EUT facing the transmitting antenna. If an error is detected when the susceptible side of the EUT facing the transmitting antenna, the field is reduced until the error is not repeatable, the field is then manually increased until the error begins to occur. This threshold level, the frequency and the error created are noted before continuing. Both horizontal and vertical polarization of the antenna are set on test and measured individually

### 8.4 Application of Electrical Fast Transient/Burst Immunity Test

The EUT was arranged for Power Line Coupling and for I/O Line Coupling through a capacitive clamp, where applicable. (Note: The I/O coupling test using a capacitive clamp is performed on the I/O interface cables that are longer in length than 3 meters.) A metal ground plane 2.4 meter by 2.0 meter was placed between the floor and the table and is connected to the earth by a 2.0 meter ground rod. The ground rod is connected to the test facility's electrical earth.

### 8.5 Application of Surge Immunity Test

The EUT was setup as described in IEC 61000-4-5 and the test shall be performed according to the test plan.

### 8.6 Application of Conducted Susceptibility Test

The EUT was setup according to the IEC 61000-4-6 and the test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn while the other non-excited RF input ports of the coupling devices are terminated by a 50  $\Omega$  load resistor. The frequency range is 150kHz to 80 MHz.





### **8.7 Application of Power Frequency Magnetic Field Immunity Test**

It is deemed that according to the standard of EN55032, this test is not applicable to the EUT which dose not contain devices susceptible to magnetic fields, such as CRT monitors, Hall elements, electro-dynamic microphone, magnetic field sensor, etc.

### **8.8 Application of Voltage Dips, Short Interruptions Immunity Tests**

The EUT was setup according to the IEC 61000-4-11 and the test shall be done as the procedure described in the standard.

### **8.9 Deviations from the Standard**

No deviations from EN 55024 were made when performing the tests described in this report.



## 9 - TEST DATA

### 9.1 Electrostatic Discharge Immunity Test (IEC 61000-4-2)

Temperature ( °C )	15~35
Humidity ( %RH )	30~60
Barometric Pressure ( mbar )	860~1060
EUT	NETWORK APPLIANCE
M/N	NC-334R
Operating Mode	ON

Table 1: Electrostatic Discharge Immunity (Air Discharge)

IEC 61000-4-2 Test Points	Test Levels									
	-2 kV	+2 kV	-4 kV	+4 kV	-6 kV	+6 kV	-8 kV	+8 kV	-15 kV	+15 kV
Shell 2 Points	A	A	A	A	A	A	A	A	/	/
Button 10 Points	A	A	A	A	A	A	A	A	/	/
Slots 2 Point	A	A	A	A	A	A	A	A	/	/

Table 2: Electrostatic Discharge Immunity (Direct Contact)

IEC 61000-4-2 Test Points	Test Levels									
	-2 kV	+2 kV	-4 kV	+4 kV	-6 kV	+6 kV	-8 kV	+8 kV	-15 kV	+15 kV
N/A	/	/	/	/	/	/	/	/	/	/

Table 3: Electrostatic Discharge Immunity (Indirect Contact HCP)

IEC 61000-4-2 Test Points	Test Levels									
	-2 kV	+2 kV	-4 kV	+4 kV	-6 kV	+6 kV	-8 kV	+8 kV	-15 kV	+15 kV
Front Side	A	A	A	A	/	/	/	/	/	/
Back Side	A	A	A	A	/	/	/	/	/	/
Left Side	A	A	A	A	/	/	/	/	/	/
Right Side	A	A	A	A	/	/	/	/	/	/

Table 4: Electrostatic Discharge Immunity (Indirect Contact VCP)

IEC 61000-4-2 Test Points	Test Levels									
	-2 kV	+2 kV	-4 kV	+4 kV	-6 kV	+6 kV	-8 kV	+8 kV	-15 kV	+15 kV
Front Side	A	A	A	A	/	/	/	/	/	/
Back Side	A	A	A	A	/	/	/	/	/	/
Left Side	A	A	A	A	/	/	/	/	/	/
Right Side	A	A	A	A	/	/	/	/	/	/



### 9.2 Radiated Susceptibility Test (IEC 61000-4-3)

**Frequency Range (MHz):** 80~1000MHz  
**Modulation:** Amplitude 80%, 1kHz sinewave  
**Severity Level:** 3V/m

Temperature ( °C )	15~35
Humidity ( %RH )	30~60
Barometric Pressure ( mbar )	860~1060
EUT	NETWORK APPLIANCE
M/N	NC-334R
Operating Mode	ON

Frequency Range (MHz)	Front (3 V/m)		Rear (3 V/m)		Left Side (3 V/m)		Right Side (3 V/m)	
	VERT	HORI	VERT	HORI	VERT	HORI	VERT	HORI
80-1000 1400-2700	A	A	A	A	A	A	A	A

### 9.3 Electrical Fast Transient/Burst Immunity Test (IEC 61000-4-4)

Temperature ( °C )	15~35
Humidity ( %RH )	30~60
Barometric Pressure ( mbar )	860~1060
EUT	NETWORK APPLIANCE
M/N	NC-334R
Operating Mode	ON

IEC 61000-4-4 Test Points		Test Levels (kV)							
		+0.5	-0.5	+1.0	-1.0	+2.0	-2.0	+4.0	-4.0
Power Supply	L1	A	A	A	A	/	/	/	/
	L2	A	A	A	A	/	/	/	/
	Earth	/	/	/	/	/	/	/	/
	L1+L2	A	A	A	A	/	/	/	/
Power Line of EUT	L1 + Earth	/	/	/	/	/	/	/	/
	L2 + Earth	/	/	/	/	/	/	/	/
	L1+L2+Earth	/	/	/	/	/	/	/	/





**9.4 Surge Immunity Test (IEC 61000-4-5)**

Temperature ( °C )	15~35
Humidity ( %RH )	30~60
Barometric Pressure ( mbar )	860~1060
EUT	NETWORK APPLIANCE
M/N	NC-334R
Operating Mode	ON

Table 1: Surge Power Supply

Level	Voltage	Poll	Path	Pass	Fail
1	0.5kV	±	L-N	A	/
2	1kV	±	L-N	A	/
3	2kV	±	L-PE, N-PE	A	/
4	4kV	±	L-N, L-PE, N-PE	A	/

**9.5 Conducted Susceptibility Test (IEC 61000-4-6)**

**Frequency Range (MHz):** 0.15~80MHz  
**Modulation:** Amplitude 80%, 1kHz sinewave  
**Severity Level:** 3Vr.m.s.

Temperature ( °C )	15~35
Humidity ( %RH )	30~60
Barometric Pressure ( mbar )	860~1060
EUT	NETWORK APPLIANCE
M/N	NC-334R
Operating Mode	ON

Level	Voltage Level (e.m.f.) U <sub>0</sub>	Pass	Fail
1	1	/	/
2	3	A	/
3	10	/	/
X	Special	/	/



### 9.6 Voltage Dips, Short Interruptions Immunity Tests (IEC 61000-4-11)

Temperature ( °C )	15~35
Humidity ( %RH )	30~60
Barometric Pressure ( mbar )	860~1060
EUT	NETWORK APPLIANCE
M/N	NC-334R
Operating Mode	ON

Level	U2	td	Phase Angle	N	Pass	Fail
1	>95%	10ms	0/90/180/270	3	B	/
2	30%	500ms	N/A	3	C	/
3	>95%	5000ms	N/A	3	C	/

Note:

- A. The apparatus shall continue to operate as intended during and after the test. The manufacturer specifies some minimum performance level. The performance level may be specified by the manufacturer as a permissible loss of performance.
- B. The apparatus shall continue to operate as intended after the test. This indicates that the EUT does not need to function at normal performance levels during the test, but must recover. Again some minimal performance is defined by the manufacture. No change in operating state or loss or data is permitted.
- C. Temporary loss of function is allowed. Operation of the EUT may stop as long as it is either automatically reset or can be manually restored by operation of the controls.



## 10 - TEST RESULTS

---

The following tests were performed on the EUT; the actual test results are contained within the Test Data section of this report.

### 10.1 IEC 61000-4-2 Electrostatic Discharge Immunity Test Configuration

The EUT was subjected to the electrostatic discharge tests required by EN 55024 and all lower levels specified in IEC 61000-4-2.

*The EUT continued to perform as intended during and after the application of the ESD.*

### 10.2 IEC 61000-4-3 Radiated Susceptibility Test Configuration

The EUT was subjected to a 3-volt/meter, 80% Amplitude, 1 kHz Sine wave field as required by EN 55024 and all lower levels specified in IEC 61000-4-3.

*The EUT continued to perform as intended during and after the application of the electromagnetic field.*

### 10.3 IEC 61000-4-4 Electrical Fast Transient/Burst Immunity Test Configuration

The EUT was subjected to the electrical fast transient tests required by EN 55024 and all lower levels specified in IEC 61000-4-4.

*The EUT continued to perform as intended during and after the application of the EFT/B.*

### 10.4 IEC 61000-4-5 Surge Immunity Test Configuration

The EUT was subjected to the Surge Immunity tests required by EN 55024 and all lower levels specified in IEC 61000-4-5.

*The EUT continued to perform as intended during and after the application of the Surge Immunity Test.*

### 10.5 IEC 61000-4-6 Conducted Susceptibility Test Configuration

The EUT was subjected to the Conducted Susceptibility tests required by EN 55024 and all lower levels specified in IEC 61000-4-6.

*The EUT continued to perform as intended during and after the application of the Conducted Susceptibility Test.*

### 10.6 IEC 61000-4-11 Voltage Dips, Short Interruptions Immunity Tests Configuration

The EUT was subjected to the Voltage Dips/Interruptions tests required by EN 55024 and all lower levels specified in IEC 61000-4-11.

*The EUT continued to perform as intended during and after the application of the Voltage Dips/Interruptions Test.*




## APPENDIX A - PRODUCT LABELING

### CE Marking Label Specification

Specification: Text is Black or white in color and is left justified. Labels are printed in indelible ink on permanent adhesive backing and shall be affixed at a conspicuous location on the EUT or silk-screened onto the EUT.

### Proposed Label Location on EUT

EUT Rear View/Proposed CE Marking Location

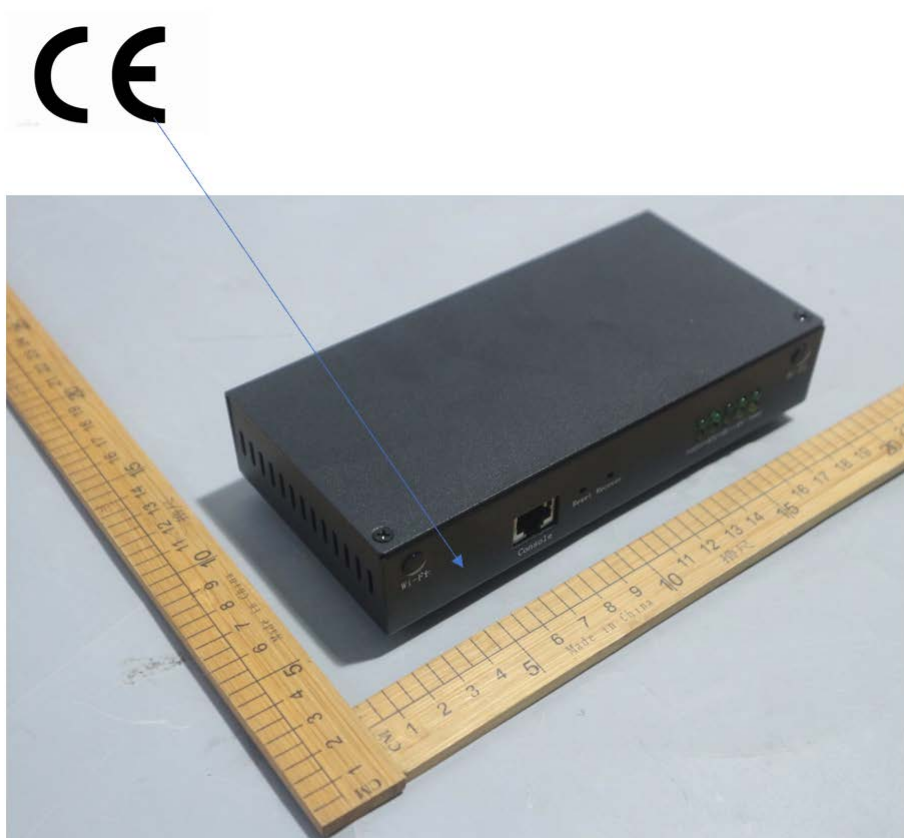




## APPENDIX B - EUT PHOTOGRAPHS








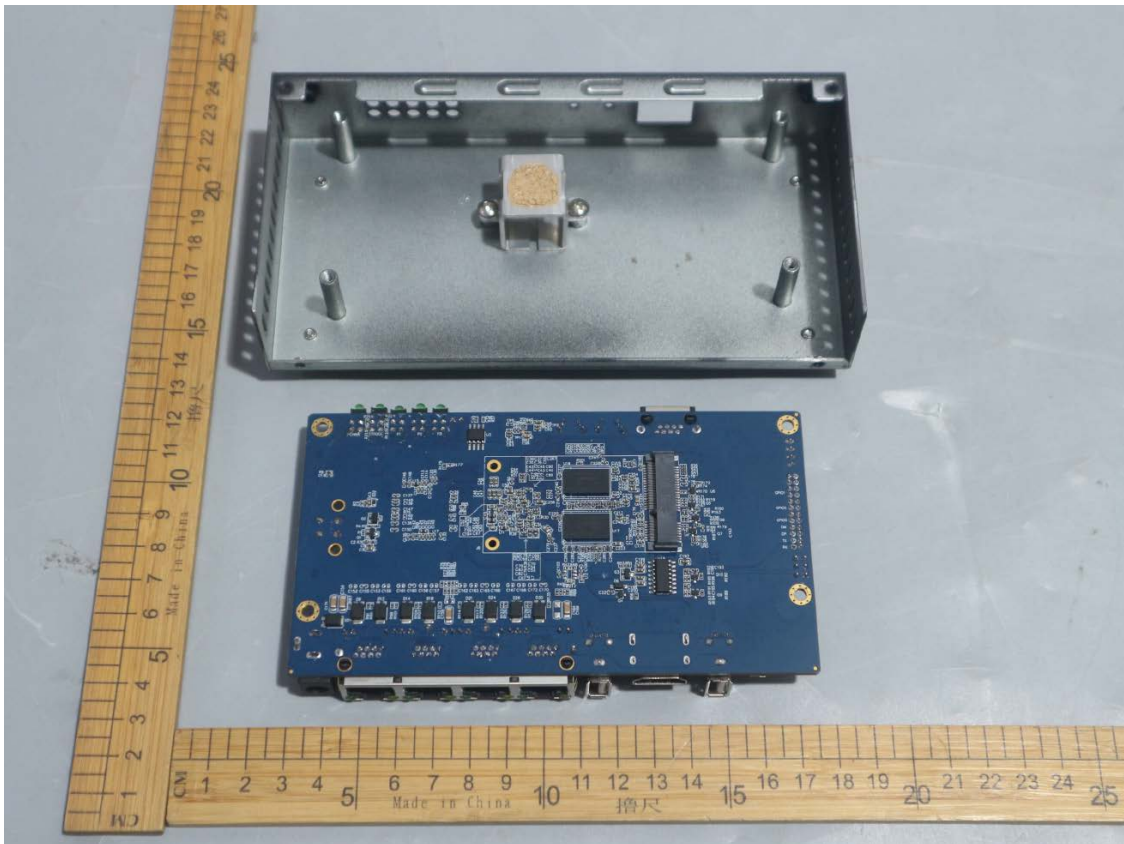

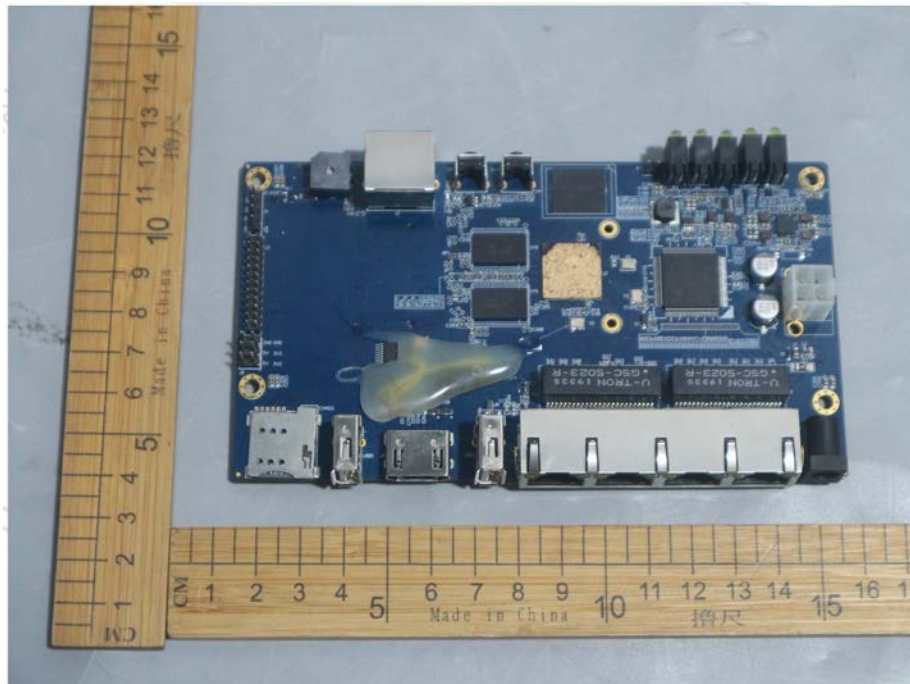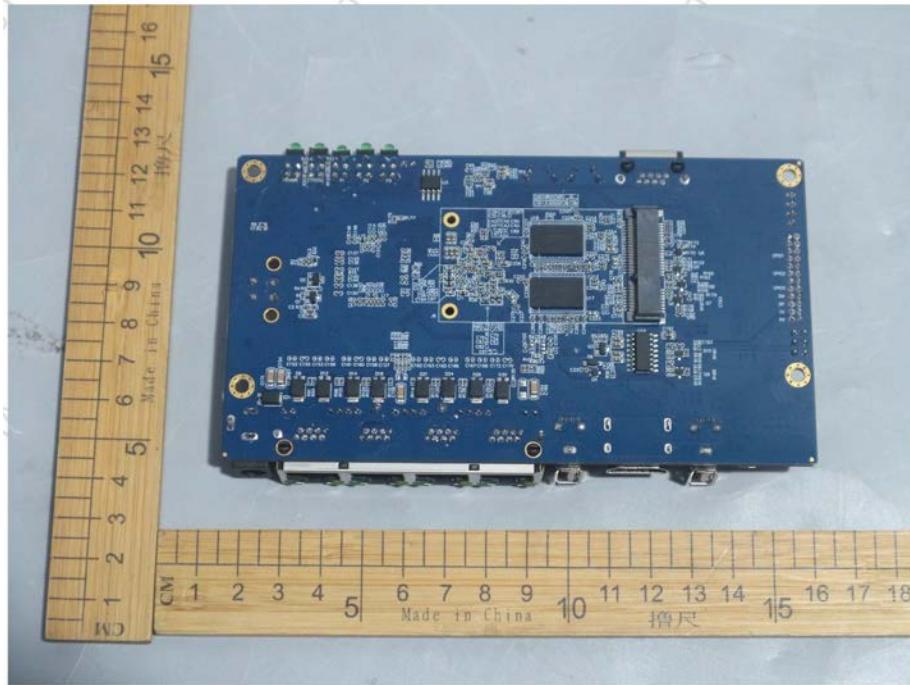



**APPENDIX C - TEST SETUP PHOTOGRAPHS**

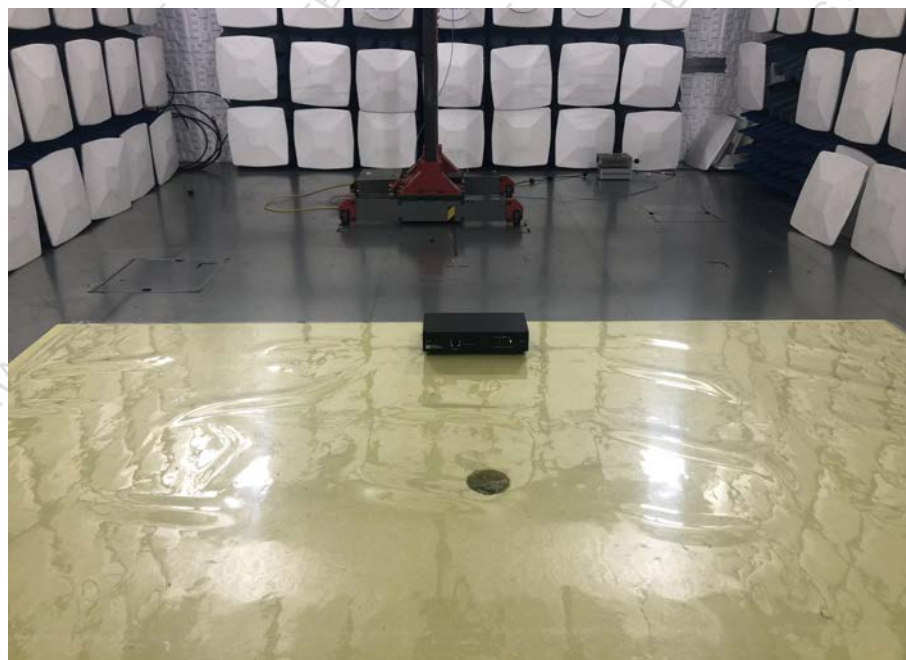

\*\*\*\*\*END OF THE REPORT\*\*\*\*\*